


## Open rack

### SPCC Model

- Material: SPCC,T:3mm
- L or U shaped bottom,in order to strengthen fixed-function.
- Protective bar & Cable arrangement accessories are available for this series.
- SGS & RoHS certificated powder coating provides oxygen,scratch,rust & corode resistance and makes the enclosure a longer life. (Standard Color : Grass green, the Others are also acceptable).

B: 19"(536)/ 23"(638)  
C: 19"(465)/ 23"(567)  
D: 19"(451)/ 23"(553)

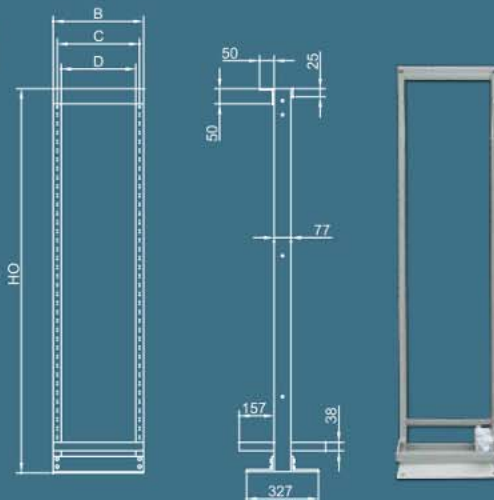

### Aluminum Model

- Main solid AL6063T5 extraction pillars makes whole piece firmly assemble.
- 2-Way design brings more convenience while daily / regular maintenance.
- Over 10mm thickness bottom extraction makes item strong & firm.
- Protective bar & Cable arrangement accessories are available for this series.
- SGS & RoHS certificated powder coating provides oxygen,scratch,rust & corode resistance and makes the enclosure a longer life. (Standard Color : White, the others are also acceptable).

B: 19"(535)/ 23"(637)  
C: 19"(465)/ 23"(567)  
D: 19"(451)/ 23"(553)



	Model No.	HO Outward Height	HI Inward Height	U Unit	Material	Width
●	NOP-15U	797	667	15	AL	19" 23"
●	NOP-30U	1464	1334	30	AL	
●	NOP-35U	1686	1556	35	AL	
●	NOP-41U	1953	1823	41	AL	
●	NOP-45U	2130	2000	45	AL	
●	NOP-58U	2708	2578	58	AL	
●	NOP-6'6"	1982	1864	42	SPCC	
●	NOP-7'	2315	2010	45	SPCC	
●	NOP-9'	2745	2620	58	SPCC	
●	NOP-11'6"	3505	3380	76	SPCC	

※ ● standard Model    ● Making for order  
※ 1U=1.75inches=44.45mm · standard unit=mm