

# WD SERIES

## Standard Rack

### WD Series 19" network rack

WD series rack cabinet are accordance with ANSI/EIA RS 310-C/D and certified by UL, CE, MIL-STD-167 vibration test, MIL-STD-810F and SGS pressing certified that can bear loads above 1500 KGW, another has passed ISO 9001. We can provide the best products and service quality.



| Standard vent door



| Customize honeycomb vent door



## | Feature



It study light weight squeeze-cast aluminum frame with 3 direction corners casting (material: ADC19) to make it more stable. In addition, it only uses 3 pieces M5 hardware in the each shaft.



Movable slide side pillars (material: AL6063T5) can fit different depth equipment. The device can be taken without any hand tools. The frame of both units can bear loads above 1500 KGW.



Flexible vertical rails that meet ANSI/EIA RS-310-C/D standard can fit different 19" cabinet rack, ex: COMPAQ, SUN, IBM, HP, ACER...etc.



The door can be easily assembled and disassembled without any additional tools. A choice of a honeycomb or an acrylic door is available for both the front and rear of the rack. (If can ventilation reach to 60%, if you choice honeycomb doors.)



Door with hide handle lock.




The side panel can be easily assembled and disassembled without any hand tools.



For ventilation and prevent rust the device can be set 2 pieces fans. (custom-design also available)



Three section of bottom frame plate can be removed for cable entry.

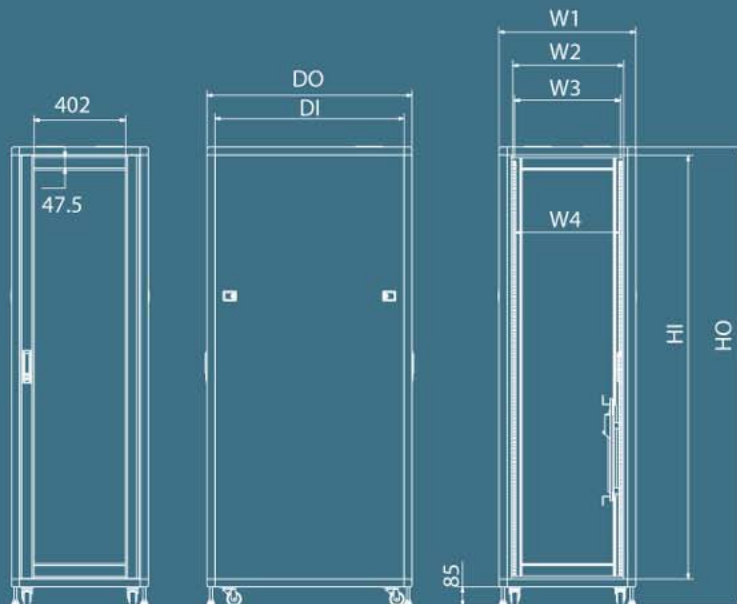

	Model No.	U Unit	DO Outward Depth	DI Inward Depth	KG	HO Outward Height	HI Inward Height
●	WD-15-62	15U	620	550	42	860	668
●	WD-15-77		770	700	50		
●	WD-15-90		900	830	57		
●	WD-20-62	20U	620	550	50	1082	889
●	WD-20-77		770	700	57		
●	WD-20-90		900	830	66		
●	WD-25-62	25U	620	550	55	1305	1112
●	WD-25-77		770	700	64		
●	WD-25-90		900	830	73		
●	WD-30-62	30U	620	550	62	1527	1334
●	WD-30-77		770	700	71		
●	WD-30-90		900	830	79		
●	WD-35-62	35U	620	550	68	1749	1556
●	WD-35-77		770	700	77		
●	WD-35-90		900	830	83		
●	WD-35-100	35U	1000	930	88	1749	1556
●	WD-35-110		1100	1030	99		
●	WD-41-62		41U	620	550		
●	WD-41-77	770		700	85		
●	WD-41-90	900		830	90		
●	WD-41-100	41U	1000	930	96	2016	1823
●	WD-41-110		1100	1030	100		
●	WD-42-62		42U	620	550		
●	WD-42-77	770		700	86		
●	WD-42-90	900		830	91		
●	WD-42-100	1000		930	97		
●	WD-42-110	42U	1100	1030	102	2060	1867

## Feet model



**Standard :**  
The device can be set 2.5" caster or on a 4" floor stand can poise the equipment.



**Optional :**  
extensible floor leveler, avoid the equipment tilt.

※ ● standard Model    ● Making for order  
※ 1U=1.75inchs=44.45mm · standard unit=mm

Inch	W1	W2	W3	W4
19"	600	482	465	451
23"	702	584	567	553