






HD Series 19" Standard Rack

19" Server Racks - HD series are accordance with ANSI/EIA RS 310-C/D and certified by UL, CE, MIL-STD-167 vibration test and pressing certified that can bear loads above 2500 KGW, and have passed ISO 9001. 19" server racks offer of complete network supplies and solutions for all types of businesses.

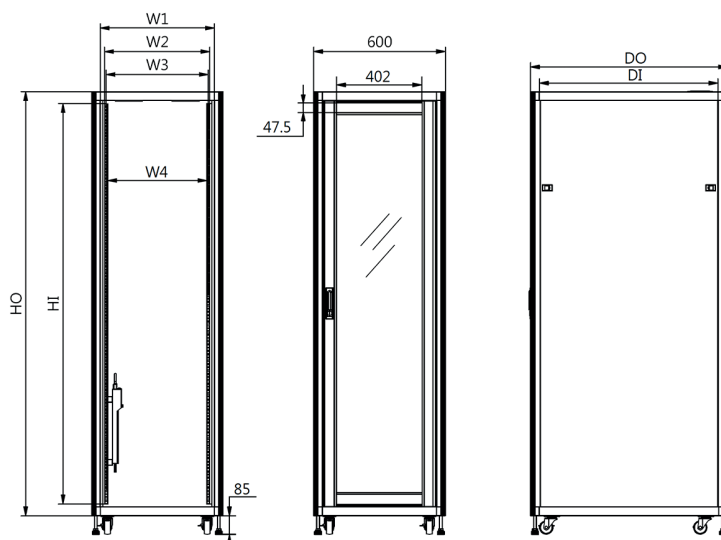

Schematic diagram of the caster bracket

Model No.	U Unit	DO Outside Depth	DI Inside Depth	KG	HO Outside Height	HI Inside Height
HD-15-62	15U	620	550	24	860	668
HD-15-77		770	700	29		
HD-15-90		900	830	34		
HD-20-62	20U	620	550	29	1082	889
HD-20-77		770	700	34		
HD-20-90		900	830	39		
HD-25-62	25U	620	550	37	1305	1112
HD-25-77		770	700	41		
HD-25-90		900	830	44		
HD-30-62	30U	620	550	41	1527	1334
HD-30-77		770	700	45		
HD-30-90		900	830	49		
HD-35-62	35U	620	550	45	1749	1556
HD-35-77		770	700	50		
HD-35-90		900	830	53		
HD-35-100		1000	930	56		
HD-35-110		1100	1030	59		
HD-41-62	41U	620	550	50	2016	1823
HD-41-77		770	700	56		
HD-41-90		900	830	59		
HD-41-100		1000	930	63		
HD-41-110		1100	1030	66		
HD-42-62	42U	620	550	50	2060	1867
HD-42-77		770	700	55		
HD-42-90		900	830	60		
HD-42-100		1000	930	63		
HD-42-110		1100	1030	67		
HD-42-120		1200	1130	70		
HD-45-90	45U	900	830	63	2194	2001
HD-45-100		1000	930	67		
HD-45-110		1100	1030	71		

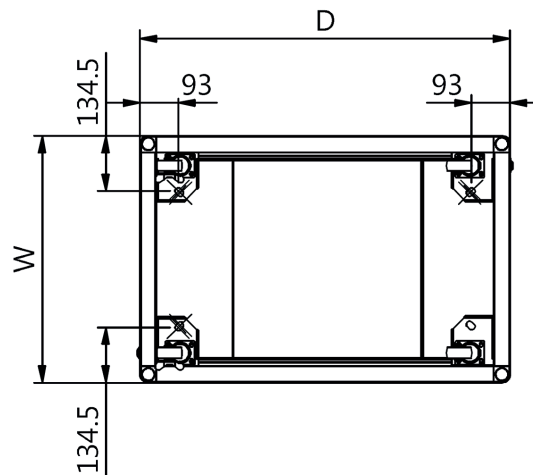

Standard vent door




Customize honeycomb vent door

Inch	W1	W2	W3	W4
19"	600	483	465	451
23"	702	584	567	553

※ Available to customize

※ 1U=1.75inches=44.45mm , standard unit = mm

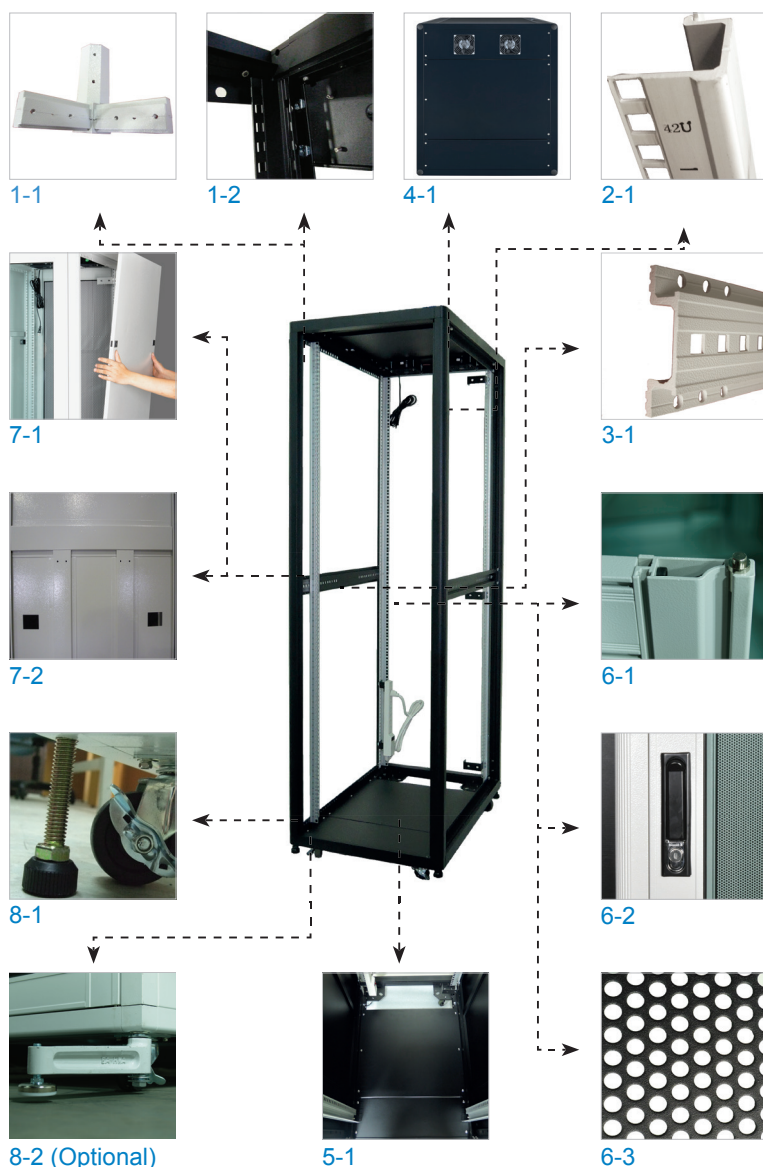

4 Top cover

2 ventilation fans and adjustable cover (3-pieces) to do dust-proof and cool down. (It's adjustable as per customer demand)

5 Bottom frame

3-pieces adjustable Bottom plate on the bottom frame which plate can be removed by cable entry.

6 Front and rear Door frames

The doors are acrylic or standard vent doors for combined options including concealed locks and handles. It can be easily assembled and removed without tools. (There is also a honeycomb vent door for options that can reach 60% of heat removal.

7 Side panel

The side panel can be easily assembled and removeable without tools.

8 Anti-vibration brackets

The device can be set the 2.5" caster and the 4" leveling feet can poise the equipment.

9 Power strip inside (8-way 110V / 120V)

It's passed UL certified. (it's also available in customized specification)

10 Surface finish of the rack

Applying powder coating to prevent from get rust, oxidization and scuffing damage etc. This is accordance with ROHS standard. Our standard color is white and black. (custom color also available)

Features

1 Main structure

Its steady lightweight aluminum extrusion frame (material: AL6063T5) with 3 direction integrally molded corners casting (material: ADC12) to make frames more stable. In order to enhance shock resistance, it connects with three directions of XYZ axes by M5 HSCS and stainless steel framework, while exportation or a long distance delivery, there's flat pack on service to easily build on site which may reduce the cost of transportation.

2 Mounting vertical rails

Mounting post rails that meet ANSI/EIA RS-310-C/D standard can fit different 19" cabinet rack, ex: COMPAQ, SUN, IBM, HP, ACER...etc.

3 Mounting rail (material AL6063T5)

It is movable to fit different depth of equipment. ※ High 35U above : Depth 90 cm under*4 pcs / each sets.