

FD1 SERIES

19" Electronic Server/ Cabinet Rack



Creativity Efficiency Generation



精密的設備 需要專業的承製

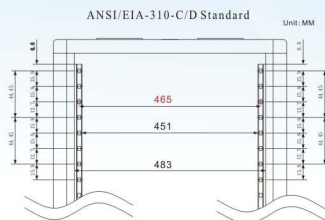
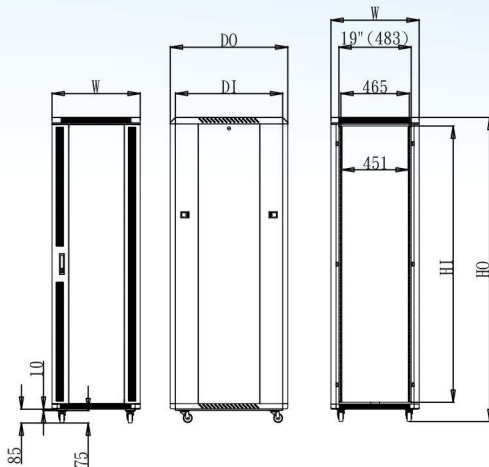


鎰謙實業有限公司
EA-HWA Enterprise Industrial Co., LTD
<http://www.ea-hwa.com.tw>

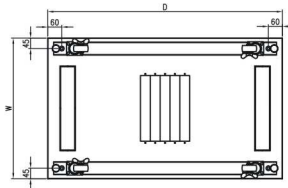
FD1 Series 19" Standard Rack

FD1 Series 19" 機櫃產品簡介

- FD1 19" Server Rack Series are accordance with ANSI/EIA RS 310- D and certified by UL, CE, and has passed ISO 9001. Our 19" server racks offer of complete network supplies and solutions for all types of businesses.
- FD1 19" 專用機櫃系列是依據ANSI/EIA RS-310- D的標準製造，通過UL、CE認證。本公司已完成ISO 9001國際品質檢驗證明，能提供客戶全系列產品及更優質的品質保障與售後服務。



Schematic diagram of the caster bracket
防震固定示意图



FD1 Rack Size of Standard Model - W600MM

FD1 系列規格表-寬600MM

Model No. 型番	U Unit 個数	DO 外 寸	DI 内 寸	HO 外 高	HI 内 高
FD1-6-1860	18U	800 510		973	800
FD1-6-1880		800 710			
FD1-6-2260		800 510			
FD1-6-2280	22U	800 710		1151	978
FD1-6-2290		900 810			
FD1-6-22100		1000 910			
FD1-6-2760	27U	800 510		1373	1200
FD1-6-2780		800 710			
FD1-6-2790		900 810			
FD1-6-27100		1000 910			
FD1-6-3260	32U	800 510		1595	1422
FD1-6-3280		800 710			
FD1-6-3290		900 810			
FD1-6-32100	37U	1000 910		1818	1645
FD1-6-3760		800 510			
FD1-6-3780		800 710			
FD1-6-3790		900 810			
FD1-6-37100	42U	1000 910		2040	1867
FD1-6-4260		800 510			
FD1-6-4280		800 710			
FD1-6-4290	45U	900 810		2173	2000
FD1-6-42100		1000 910			
FD1-6-4560		800 510			
FD1-6-4580	47U	800 710		2262	2089
FD1-6-4590		900 810			
FD1-6-45100		1000 910			
FD1-6-4760		800 510			
FD1-6-4780	47U	800 710		2262	2089
FD1-6-4790		900 810			
FD1-6-47100		1000 910			

FD1 Rack Size of Standard Model - **W800MM**

FD1 系列規格表- 寬800MM

Model No. 型番	U Unit ユニット	DO 外 寸	DI 内 径	HO 外 高	HI 内 高
FD1-8-1880	18U	800 710			
FD1-8-18100		1000 910	973	800	
FD1-8-2280		800 710			
FD1-8-2290	22U	900 810	1151	978	
FD1-8-22100		1000 910			
FD1-8-2780		800 710			
FD1-8-2790	27U	900 810	1373	1200	
FD1-8-27100		1000 910			
FD1-8-3280		800 710			
FD1-8-3290	32U	900 810	1595	1422	
FD1-8-32100		1000 910			
FD1-8-3780		800 710			
FD1-8-3790	37U	900 810	1818	1645	
FD1-8-37100		1000 910			
FD1-8-4280		800 710			
FD1-8-4290	42U	900 810	2040	1867	
FD1-8-42100		1000 910			
FD1-8-4580		800 710			
FD1-8-4590	45U	900 810	2173	2000	
FD1-8-45100		1000 910			
FD1-8-4780		800 710			
FD1-8-4790	47U	900 810	2262	2089	
FD1-8-47100		1000 910			

※1U=1.75inchs=44.45mm・standard unit = mm

※1U=1.75英吋=44.45公釐，標準單位=公釐

※Dimensional tolerances 尺寸公差= ±3mm



Feature: 特色說明:

1. Exquisite design with precise craftsmanship. Welded steel frame for front and back part (material: SPCC), that can be flat packing, easy to transfer.

精緻的外觀設計，主體框體為焊接式之鐵材(材質: SPCC)，外型精緻，結構穩固，可散裝及方便運送。

2. Flexible vertical rails that meet ANSI/EIA RS-310-D standard can fit different 19" cabinet rack, ex: COMPAQ, SUN, IBM, HP, ACER...etc.

活動方孔柱之孔位間距符合國際標準之ANSI/EIA RS-310-D規格，可配合不同廠牌之r型主機上架使用，如: COMPAQ, SUN, IBM, HP, ACER等廠牌。



3. Movable slide side pillars can fit different depth equipment.

定位方孔軌柱設計，可讓使用者依設備實際深度調整前後活動方孔柱的距離。

4. Cable entry on the top, adjustable cable entrance at the bottom with panel.

上蓋板附有一個方型走線孔，下蓋板的走線孔皆附有面板，可依走線需求作調整覆蓋。



5. The door can be easily assembled and disassembled without any additional tools.

Tempered glass front door with a handle lock, that door frame has vented.

門組不需工具即可輕鬆拆卸。前門為強化玻璃門，並裝置一組隱藏式門鎖，前門的左右門框上各開一排散熱孔。



6. Vent steel rear door with a round lock. The doors can be opened about 180 degree.

後門為鐵製網孔門並附裝置一組圓鎖。門組可開啟約180度。



7. The side panel can be easily assembled and removable without any hand tools, and with the round lock.

可拆式側板為無螺絲設計，無需工具即可拆卸，每片側板附有一顆圓鎖。



8. The rack can be set the caster and the leveling feet can poise the equipment.

機櫃下方可安裝輪組及地平調整螺絲，可方便調整機櫃水平。



9. The standard color is black color for powder coated.

標準顏色為粉體烤漆黑色。

10. Unassembled packing will save about 2/5 of original volume for container space.

散裝出貨將可節省下許多貨櫃空間。散裝的材積只有原本材積的2/5。

11. Top panel with fan unit to make the ventilation of equipment.







上蓋安裝靜音散熱風扇2只(通過UL合格認證)，以便設備散熱。



12. Power strip inside (8-way 110V), it's also passing UL certified.

電源排插採標準3孔8只插座，電壓可選擇為110V或220V，且具電源開啟指示燈、15A突波保護裝置，電源線耐壓125V~225V，耐溫-20℃~75℃，線長1.8米，並通過UL認證。(可依需求選購特殊規格電源)

Accessory-optional 選購配件

 Supporting Plate 支撐平板 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 400*445/SP-1940 550*445/SP-1955 700*445/SP-1970 Load weight 耐重: 40KGS	 Angle 支架 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 390*55*38/AS-390 540*55*38/AS-540 690*55*38/AS-690
 Reinforce Shelf 加強型支撐板 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 400*445/RS-1940 550*445/RS-1955 700*445/RS-1970 Load weight 耐重: 100KGS	 1U Cable Collector Panel (2 port, 3port) 1U走線面板(2孔、3孔) MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 482*44*14.5/CMP-1901
 1U Server Exclusive Shelf 1U爪式支撐板 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 400*482/SES-1940 550*482/SES-1955 700*482/SES-1970 Load weight 耐重: 100KGS	 Blank Panel 空白面板 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 1U-482*44*14.5/BP-1901 2U-482*88*14.5/BP-1902 3U-482*133*14.5/BP-1903
 1U Server Exclusive Sliding Plate 1U爪式抽拉板 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 400*482/SV-1950 550*482/SV-1955 700*482/SV-1970 Load weight 耐重: 50KGS	 Horizontal Cable Duct 水平理線槽 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 1U-482*70*44/HCD-1901 2U-482*70*88/HCD-1902
 Space Plate 層板 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 1U-250*482*44/SP-1901 2U-400*482*88/SP-1902 Load weight 耐重: 20KGS	 Cable Management Panel 水平理線環 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 1U-482*81*44/HCP-1901 2U-482*81*88/HCP-1902
 2U Keyboard Tray 2U抽拉板 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 482*400*88/K8-1902	 8 way plastic power stripe 8孔塑膠電源 MAT. 材質: ABS(塑膠) Color 顏色: White(白) SPEC.規格: 110V-15A-1.5M 15A or 20A Length 線長: 1.8M
 Drawer 抽屜 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 2U-482*400*88/DU-1902 4U-482*400*177/DU-1904	 19" 1U 8 way external power socket stripe 1U8孔機架式鑲製朝外電源 MAT. 材質: SPCC Color 顏色: Black(黑) SPEC.規格: 110V or 220V 15A or 20A or 30A Length 線長: 1.8M or 3M
 Copper Earthing Terminal 接地銅棒、排 MAT. 材質: Copper(銅) SPEC.規格: 41U-1800*4*04/CET-1804 41U-1800*12*3/CET-1812 19"-482*12*3/CET-1912	 3U Fan Box 3U風扇盒 MAT. 材質: SPCC Color 顏色: Black(黑) or White(白) SPEC.規格: 42*133*450/NEF-0303

※If you need other accessories, please contact us.

※尚上有表未登載之配件，歡迎來電選購。

Headquarter (factory): No.7, Lane 229, Shigu Rd., Shengang Township, Changhua County 50956, Taiwan TEL: +886-4-7990312 Fax: +886-4-7990865
 總經銷部: 509彰化縣伸港鄉什股村什股路229巷7號 電話: +886-4-7990312 傳真: +886-4-7990865

Taipei Office Dept.: 9F, No.84, Xingde Rd., Sanchong Dist., New Taipei City 241, Taiwan TEL: +886-2-29996339 FAX: +886-2-29996329
 台北營業部: 241新北市三重區興德路84號9F 電話: +886-2-29996339 傳真: +886-2-29996329

Kaohsiung Office Dept.: Building D, No.142-5, Zhongzheng Rd., Niasong Dist., Kaohsiung City 833, Taiwan TEL: +886-7-735-2158 FAX: +886-7-735-2159
 高雄營業部: 833高雄市鳥松區中正路142-5號D棟 電話: +886-7-735-2158 傳真: +886-7-735-2159